

ADDENDUM NO. 1
to the
CONTRACT DOCUMENTS
for
Barnett Ravine Storm Water Improvement Project
Village of Fox Point, Wisconsin

May 26, 2021

To All Plan Holders:

The following changes, additions, and/or deletions are hereby made a part of the Contract Documents for the Barnett Ravine Storm Water Improvement Project, Village of Fox Point, Wisconsin, dated May 17, 2021 as fully and completely as if the same were fully set forth therein:

- 1. Bid opening is moved to Thursday June 3, 2021 from Tuesday June 1, 2021.**
- 2. Replace plan sheet 5 with plan sheet 5A.**
 - a. The asphalt apron along N. Barnett Lane shall be removed after construction and shall be paid for under the Excavation Common bid item. The total volume of excavation will be approximately 7 CY. Saw cutting shall incidental.**
 - b. Minor grading/restoration is required along access road to smooth out the slopes. The total volume of excavation will be approximately 3 CY. This work shall be paid for under the Excavation Common bid item.**
 - c. Common Witchhazel screening bushes shall be planted. A bid item has been added to the bid form (see below).**
- 3. Replace Bid Form Sheet BF-3 with BF-3A.**
 - a. Add bid item 23-632.0201 Shrubs (Hamamelis Virginiana, 10 gallon)**
 - b. Increase Excavation Common quantity by 10 CY to 120 CY.**

All Bidders shall acknowledge receipt and acceptance of this Addendum No. 1 for the Barnett Ravine Storm Water Improvement Project, Village of Fox Point, Wisconsin consisting of **3 pages**, by signing in the space provided and submitting this page of the signed Addendum with the Bid. Bids submitted without this page of the Addendum may be considered nonresponsive.

Sincerely,

Aaron Groh, P.E.
Associate / Milwaukee Municipal Manager

Receipt acknowledged and conditions agreed to this

Date _____

Bidder _____

4. Bidder will complete the Work in accordance with the Contract Documents for the following prices:

A. UNIT PRICE BASE BID

BARNETT RAVINE STORM WATER IMPROVEMENT PROJECT					
ITEM NO.	ITEM	QTY	UNIT	UNIT PRICE	TOTAL
1-201.0105	Clearing	2	STA		
2-201.0120	Clearing	30	ID		
3-201.0120	Clearing – Undistributed	50	ID		
4-204.0210	Removing Manholes	1	EACH		
5-204.0245	Removing Storm Sewer (12-Inch)	255	LF		
6-205.0100	Excavation Common	120	CY		
7-205.0100	Excavation Common – Undistributed	100	CY		
8-209.1500	Backfill Granular Grade 1 – Undistributed	30	CY		
9-416.0610	Drilled Tie Bars	75	LF		
10-606.0100	Riprap Light	10	CY		
11-606.0300	Riprap Heavy	125	CY		
12-625.0100	Topsoil	610	SY		
13-628.1504	Silt Fence	550	LF		
14-628.2027	Erosion Mat Class II Type C	1,210	SY		
15-628.7504	Temporary Ditch Checks – Sediment Logs	650	LF		
16-629.0210	Fertilizer Type B	1	CWT		
17-630.0175	Seeding Mixture No. 75	2	LB		
18-630.0200	Seeding Temporary	4	LB		
19-645.0120	Geotextile Fabric Type HR	335	SY		
20-SPV.9400	12” HDPE Storm Pipe Directionally Drilled Special	215	LF		
21-SPV.9500	12” Restrained-Joint Storm Pipe Special	180	LF		
22-SPV.9700	36” Outlet Structure Special	1	EACH		
23-632.0201	Shrubs (Hamamelis Virginiana, 10 gallon)	3	EACH		
TOTAL BASE BID FOR BARNETT RAVINE STORM WATER IMPROVEMENT PROJECT:					


TOTAL BASE BID PRICE:

(Words)

BF-3A

PROJECT:
**BARNETT RAVINE
STORM WATER
IMPROVEMENT
PROJECT**



LOCATION:
**VILLAGE OF FOX
POINT**



RELEASE:
BID SET

REVISIONS:

#	DATE	DESCRIPTION
1	5/17/21	BID SET




SEAL:

all in

SHEET:
EROSION CONTROL

PROJECT MANAGER: YA
PROJECT NUMBER: 19.0536.01
DATE: 5/17/21

SHEET NUMBER:
5A

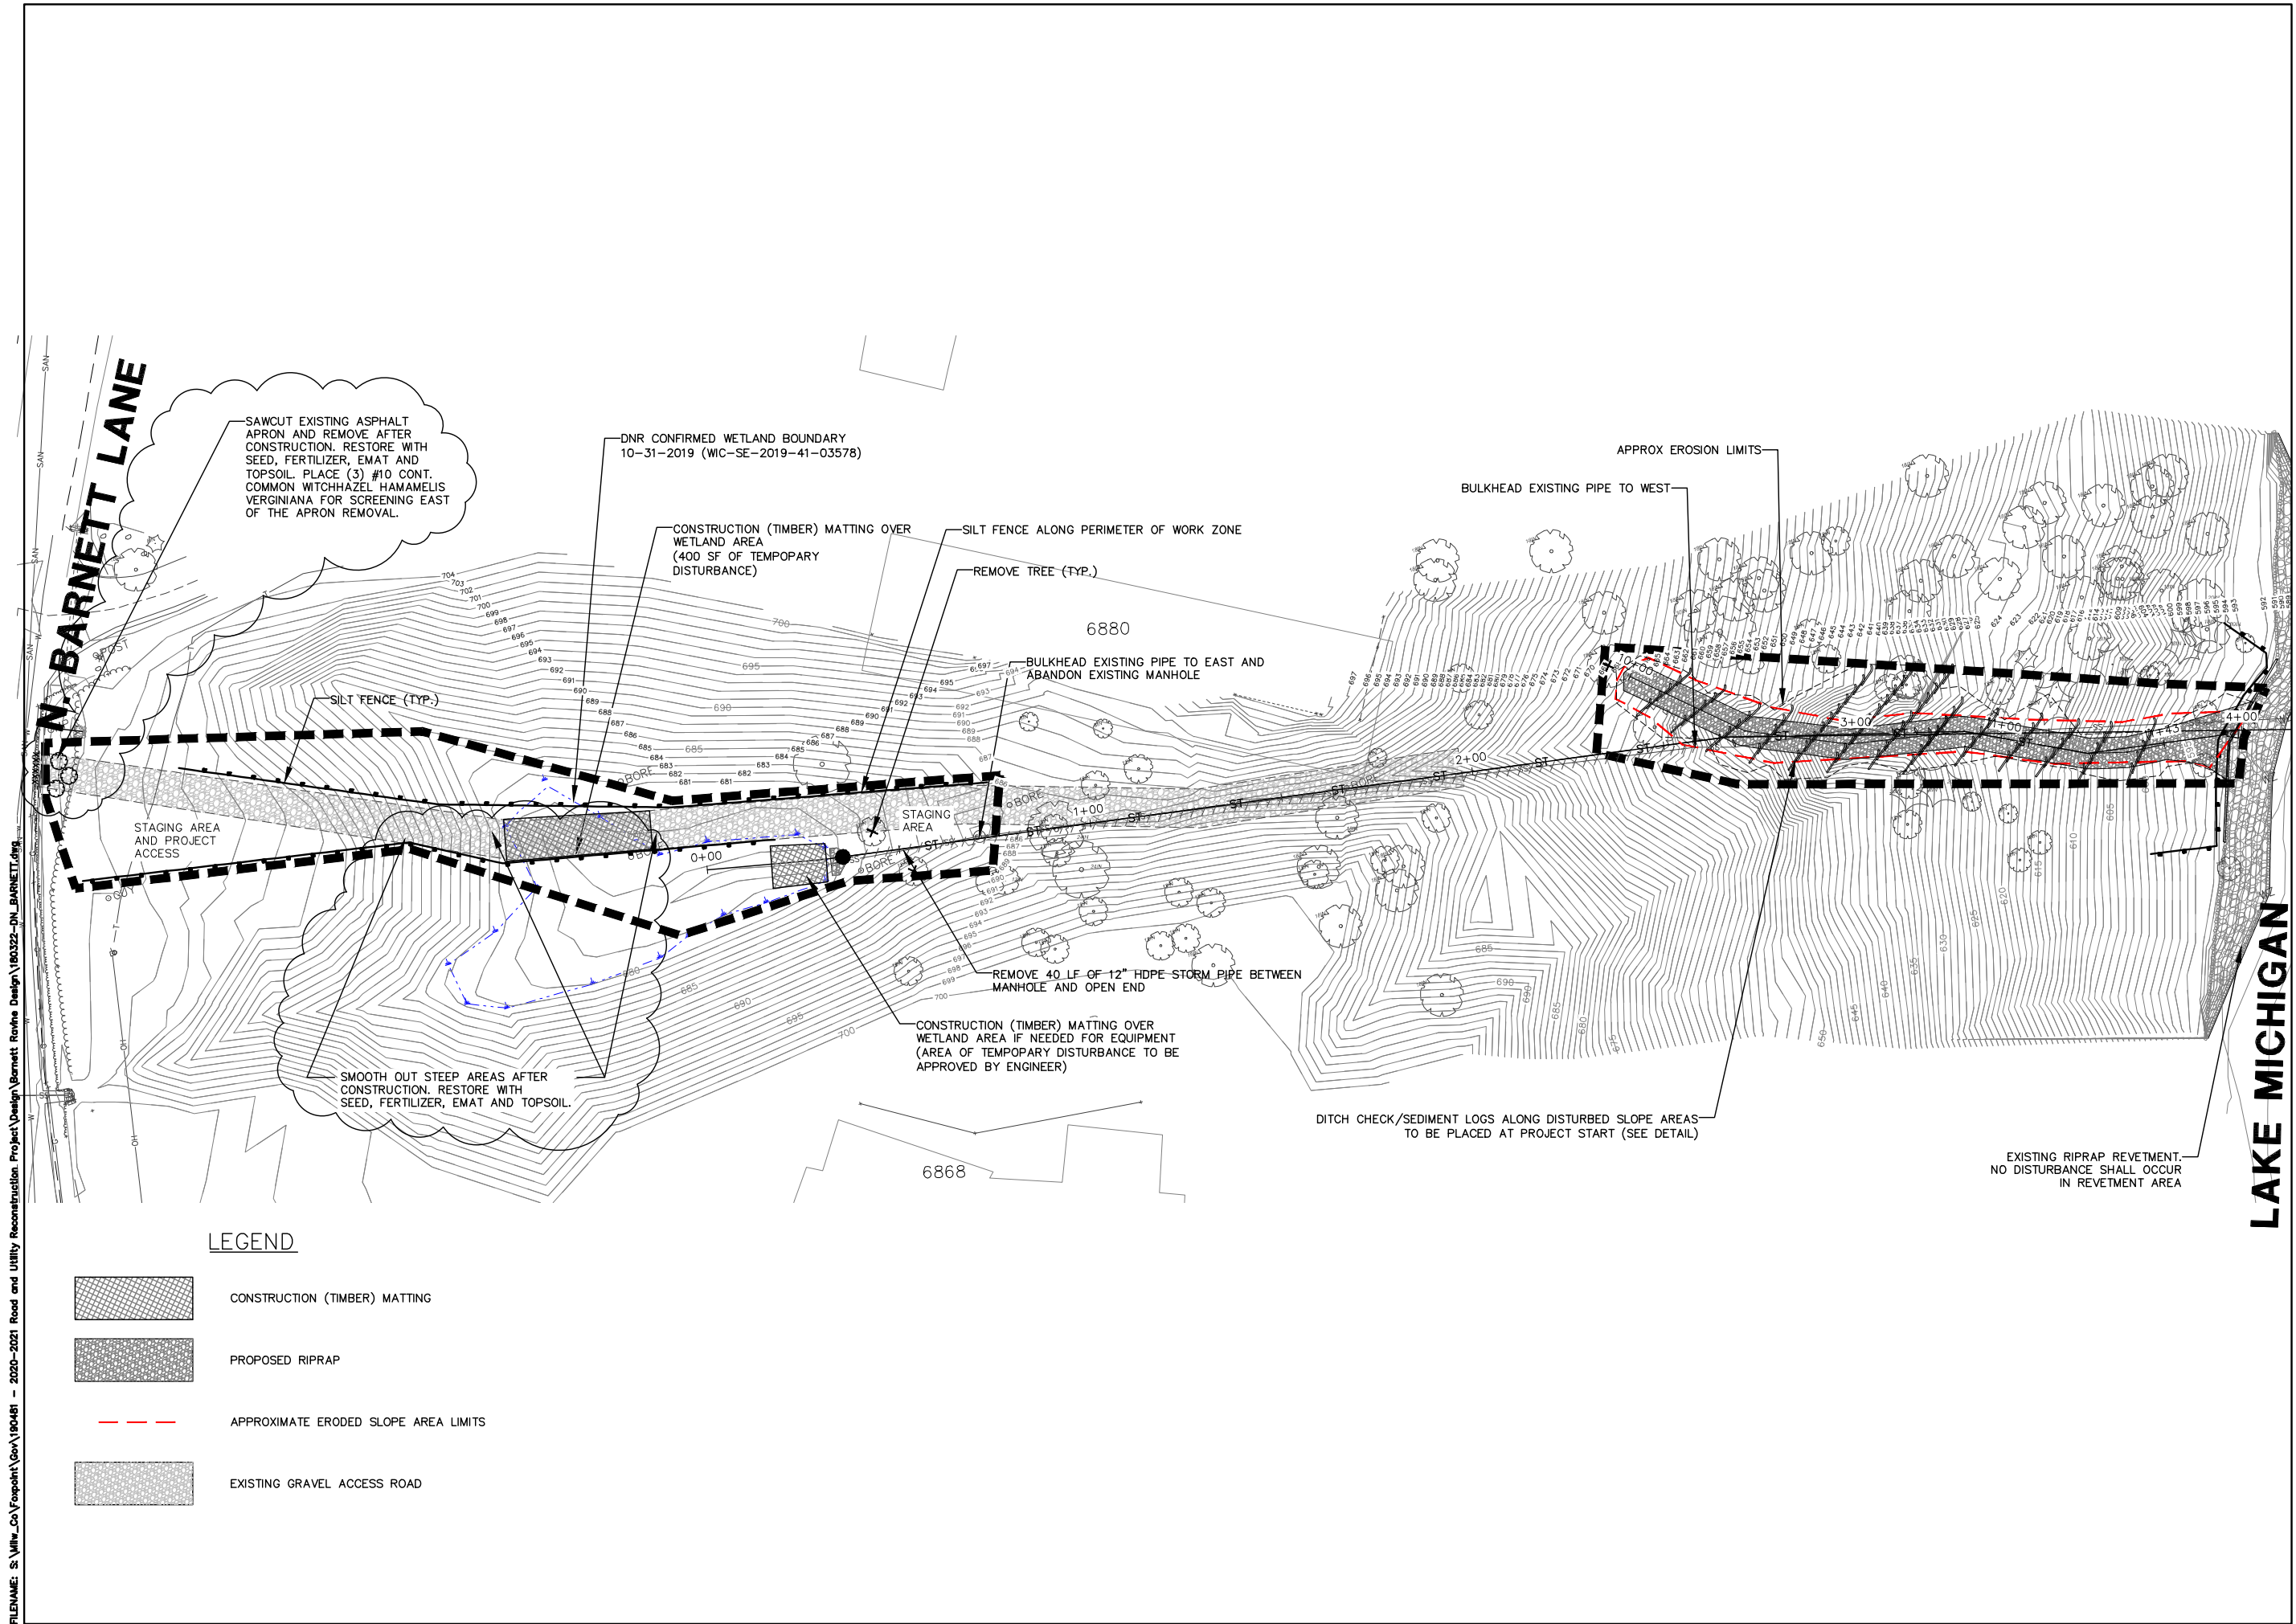

LEGEND

- CONSTRUCTION (TIMBER) MATTING
- PROPOSED RIPRAP
- APPROXIMATE ERODED SLOPE AREA LIMITS
- EXISTING GRAVEL ACCESS ROAD

FILENAME: S:\Milw_Co\Foxpoint\Gov\190461 - 2020-2021 Road and Utility Reconstruction, Project Design\Barnett Ravine Design\190322-DN_BARNETT.dwg